


CURSOR 16

600 Rated at 600 Mhp @ 1800

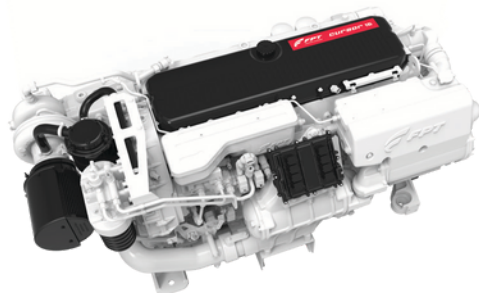

SPECIFICATIONS

Type	Diesel 4 Stroke
Configuration	Inline 6 Cylinder
Air Handling	Turbocharged Air Cooled
Bore X stroke	141 x 170 mm
Displacement	15.9 L
Compression Ratio	15.5 : 1
Valves per Cylinder	4
Rotation	CCW
Fuel System	Electronic Common Rail
Cylinder Head Material	CGI
Over Head Camshaft	Heat Treated Steel
Piston	Steel Crown Dual Lip
Moment of Inertia	Re-entrant
Temperature Regulation	.4845 kg/m2
Cold Start Aid	72-80C
Cooling System	Yes
	HXC and KC


RATINGS

600 Mhp @ 1800	2004 ft/lbs @ 1300 RPM
----------------	------------------------

STANDARD CONFIGURATION

Emissions Level	EPA Tier 3
Flywheel SAE1	19"
Flywheel Housing	Cast Iron
Flywheel Housing	SAE 1
Oil Sump	Aluminum 10 Degree Static
Voltage	24v
Alternator	90A/120A
Starter	5.5 kW
Dimensions	57.7" x 44.7" x 45.7"
Weight Dry	3461 lbs
Weight Wet	3706 lbs

FPT C16 600 Performance Curve

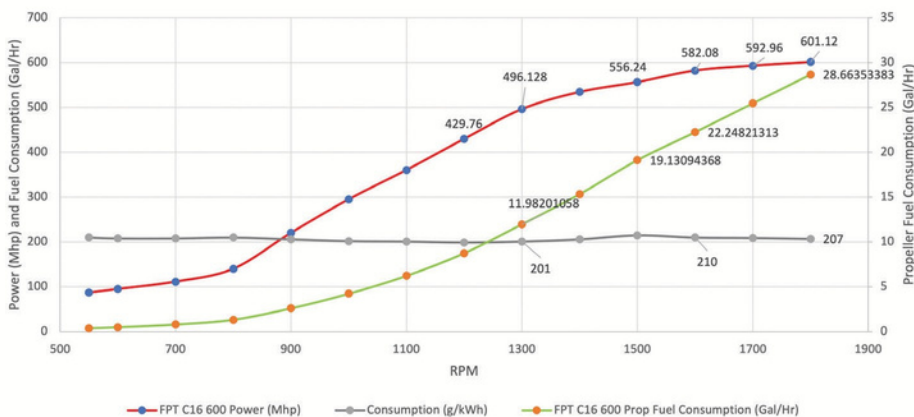

C16 600 Mhp — RATING D - 441 kW

Engine Speed (r p m)	Peak Power (Mhp)	Propeller Power (Mhp)	Torque (ft/ lbs)	Propeller Fuel Consumption (gal/ hr)	Consumption (g/kWh)
550	87.0	8.1	831.2	0.4	210.0
600	95.2	10.6	833.3	0.5	208.0
700	111.5	16.9	836.7	0.8	208.0
800	140.1	27.7	919.6	1.3	210.0
900	220.3	55.1	1285.7	2.6	206.0
1000	295.1	91.1	1550.0	4.2	202.0
1100	360.4	134.6	1720.7	6.2	201.0
1200	429.8	191.0	1880.9	8.8	199.0
1300	496.1	258.8	2004.4	12.0	201.0
1400	534.3	323.2	2004.6	15.3	206.0
1500	556.2	386.3	1947.6	19.1	215.0
1600	582.1	459.9	1910.7	22.2	210.0
1700	593.0	528.9	1831.9	25.5	209.0
1800	601.1	601.1	1753.9	28.7	207.0

= Range of highest engine efficiency

NEWFOUNDLAND & LABRADOR

141 Glencoe Drive
Mount Pearl, NL | A1N 4S7
Phone: (709) 726-6774
Email: sales@madспенpower.ca

ONTARIO

30 Voyager Court South
Toronto, Ontario | M9W 5M7
Phone: (416) 907-3844
Email: sales@madспенpower.ca

