


CURSOR 13

520 Rated at 520 Mhp @ 2000

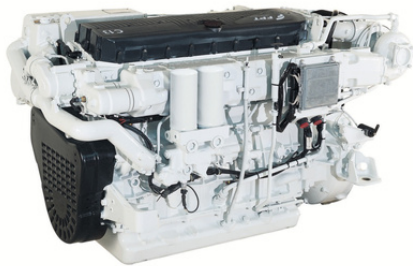

SPECIFICATIONS


Type	Diesel 4 Stroke
Configuration	Inline 6 Cylinder
Air Handling	Turbocharged Air Cooled
Bore X stroke	135 x 150 mm
Displacement	12.88 L
Compression Ratio	16.5 :1
Valves per Cylinder	4
Rotation	CCW
Fuel System	EUI
Cylinder Head Material	Cast
Over Head Camshaft	Heat Treated Steel
Piston	Aluminum double lip re-entrant
Moment of Inertia	.4845 kg/m2
Temperature Regulation	72-80C
Cold Start Aid	Yes
Cooling System	HXC and KC

RATINGS

520 Mhp @ 2000	1896 ft/lbs @ 1300 RPM
----------------	------------------------

STANDARD CONFIGURATION

Emissions Level	IMO 2 14" Aluminum SAE 1
Flywheel SAE1	Aluminum 10 Degree
Flywheel Housing	Static 24v 90A 5.5 kW
Flywheel Housing	57.7" x 39.4" x 42" 3075 lbs
Oil Sump	3230 lbs
Voltage	
Alternator	
Starter	
Dimensions LxWxH	
Weight Dry	
Weight Wet	

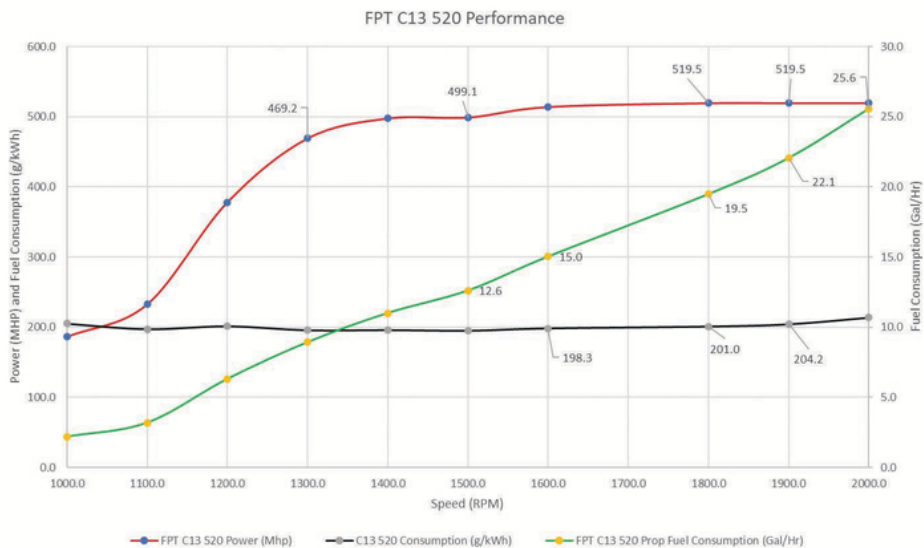

C13 520 Mhp — RATING C - 382 kW

Engine Speed (r p m)	Peak Power (Mhp)	Propeller Power (Mhp)	Torque (ft/ lbs)	Propeller Fuel Consumption (gal/ hr)	Consumption (g/kWh)
1000	186.3	46.6	978.6	2.2	205.0
1100	232.6	70.3	1110.4	3.2	197.1
1200	378.1	136.1	1654.7	6.3	201.3
1300	469.2	198.2	1895.6	8.9	195.6
1400	497.8	243.9	1867.3	11.0	195.9
1500	499.1	280.8	1747.6	12.6	195.0
1600	514.1	329.0	1687.5	15.0	198.3
1800	519.5	420.8	1515.8	19.5	201.0
1900	519.5	468.9	1436.1	22.1	204.2
2000	519.5	519.5	1364.3	25.6	213.6

= Range of highest engine efficiency

NEWFOUNDLAND & LABRADOR

141 Glencoe Drive
Mount Pearl, NL | A1N 4S7
Phone: (709) 726-6774
Email: sales@madспенpower.ca

ONTARIO

30 Voyager Court South
Toronto, Ontario | M9W 5M7
Phone: (416) 907-3844
Email: sales@madспенpower.ca

