


CURSOR 13

825 Rated at 750 Mhp @ 2400

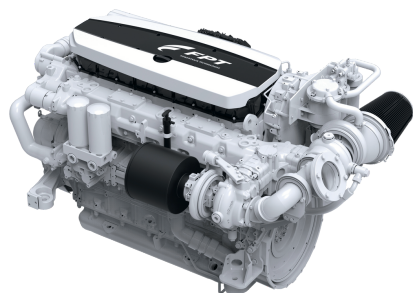

SPECIFICATIONS

Type	Diesel 4 Stroke
Configuration	Inline 6 Cylinder
Air Handling	Turbocharged Air Cooled
Bore X stroke	135 x 150 mm
Displacement	12.88 L
Compression Ratio	15.5 : 1
Valves per Cylinder	4
Rotation	CCW
Fuel System	EUI
Cylinder Head Material	Cast
Over Head Camshaft	Heat Treated Steel
Piston	Aluminum Double Lip
Moment of Inertia	Re-entrant
Temperature Regulation	.4845 kg/m2
Cold Start Aid	72-80C
	Yes


RATINGS

750 Mhp @ 2400	1950 ft/lbs @ 1650 RPM
----------------	------------------------

STANDARD CONFIGURATION

Emissions Level	IMO 2 14" Aluminum SAE
Flywheel SAE1	1 Aluminum 10 Degree
Flywheel Housing	Static 24v 90A 5.5 kW
Flywheel Housing	57.7" x 39.4" x 42" 3075 lbs
Oil Sump	3330 lbs
Voltage	
Alternator	
Starter	
Dimensions LxWxH	
Weight Dry	
Weight Wet	

FPT C13 750E Performance

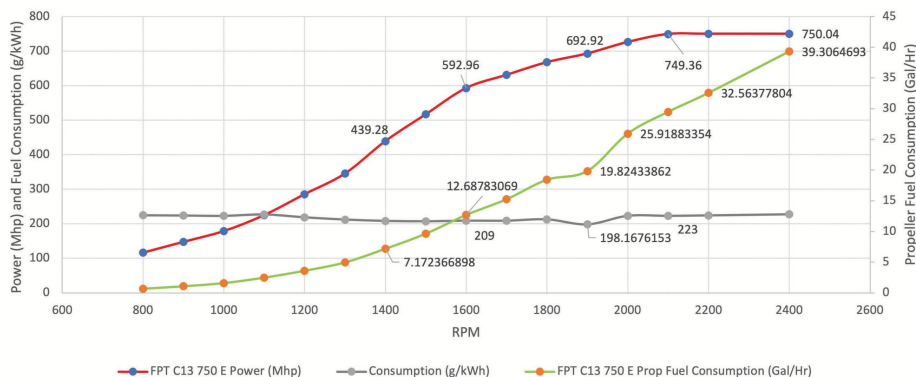

C13 750 Mhp — RATING B1 - 551 kW

Engine Speed (rpm)	Peak Power (Mhp)	Propeller Power (Mhp)	Torque (ft/ lbs)	Propeller Fuel Consumption (gal/ hr)	Consumption (g/kWh)
800	116.3	12.9	763.4	0.7	224.6
900	147.6	20.8	861.1	1.1	223.9
1000	178.8	31.0	939.3	1.6	222.9
1100	225.1	47.3	1074.7	2.5	227.0
1200	285.6	71.4	1250.0	3.6	218.7
1300	345.4	101.4	1395.6	5.0	212.2
1400	439.3	149.5	1647.9	7.2	208.3
1500	516.8	201.9	1809.5	9.6	207.2
1600	593.0	263.5	1946.4	12.7	209.0
1700	631.0	316.6	1949.5	15.2	208.9
1800	667.8	375.6	1948.4	18.4	212.8
1900	692.9	434.3	1915.4	19.8	198.2
2000	726.2	504.3	1907.1	25.9	223.1
2100	749.4	537.7	1874.1	29.5	223.0
2200	750.0	630.2	1790.6	32.6	224.3
2400	750.0	750.0	1641.3	39.3	227.5

= Range of highest engine efficiency

NEWFOUNDLAND & LABRADOR

141 Glencoe Drive
Mount Pearl, NL | A1N 4S7
Phone: (709) 726-6774
Email: sales@madsenpower.ca

ONTARIO

30 Voyager Court South
Toronto, Ontario | M9W 5M7
Phone: (416) 907-3844
Email: sales@madsenpower.ca

